


Instructions for the correct mounting of GeoGrip brass fittings**Construction details****Ease of use**

GeoGrip series polythylene pipe couplings are extremely practical, as they do not have to be taken apart when connecting to the piping.




Medium:


Water, 50% max. glycol solutions, 25% max. methanol solutions,
30% max. ethanol solutions, saline solutions

Preparation of pipe


Do not cut
at an angle




Cut at 90°




Remove any
external burrs

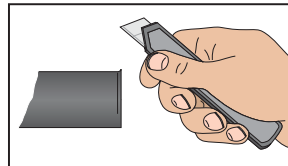

Do not remove the fitting

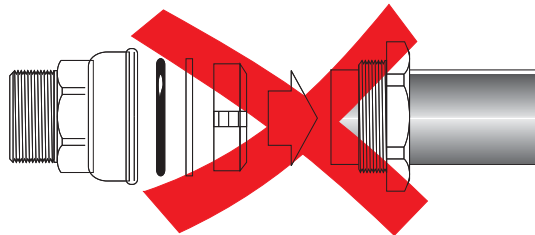

Insert the pipe right to the fitting end with the ring nut loosened. Tighten the ring nut to completely bottom out (positive stop), no threads showing, to 44-59 ft-lb torque.

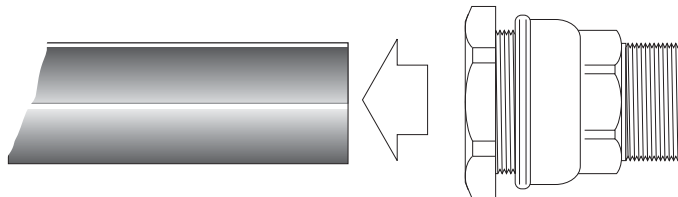

Caleffi North America, Inc.
3883 W. Milwaukee Road
Milwaukee, WI 53208
T: 414.238.2360 F: 414.238.2366